

Model JYB-DW

Tiny Differential Pressure Transmitter



DESCRIPTION

Model JYB-DW is a cost efficient and tiny differential pressure transmitter for atmosphere in dry rugged environments. The transmitter uses our proprietary current output with wide temperature compensation. This design references the primary pressure sensing diaphragm to the atmosphere, and provides a stable zero regardless of the transducer environment.

FEATURES

- 0.04 % FS/°F temperature effect
- 1.0 % accuracy
- 0.07 psig (500Pa) to 0.7psig (5000Pa) range
- 4 to 20 mA, 0 to 5VDC or RS-485/232
- Enhanced temperature stability
- CE Certification

PRESSURE MEASUREMENT

Supply Voltage	12 to 30VDC
Operating Range	Any zero based full scale from 0.07psi(500 Pa) to 0.7psi (5000 bar)
Over Pressure	Two times for the full scale
Output Signal	Current two-wire 4mA to 20mA (Load < 500Ω); Voltage 0 to 5VDC
Pressure Media	Dry gas without cankering

PERFORMANCE SPECIFICATIONS

Accuracy	±1.0% (25℃)
Response	<100ms
Long Term Stability	<0.2% FS per year
Temperature Range	-10 to 60℃
Temperature Effects	Max 1.0% FS typical over 0 to 60℃ Max 1.5% FS typical over -20 to 85℃

PHYSICAL CONNECTION

Pressure Connection	M8x1.0 screw-in adaptor
Electrical Connection	Cable Line


ORDERING CODES

JYB-DW		
I1	Current two-wire 4 ma to 20 ma	
V1	Voltage 0 to 5VDC	
W1	RS-232	
W2	RS-232	
M1	M8x1.0 screw-in adaptor	
S1	0-0.07psi	
S2	0-0.1psi	
S3	0-0.2psi	
S4	0-0.5psi	
S5	0-0.7psi	
D1	LED display	
D2	LCD display	


ELECTRICAL CONNECTION

Code	1(Red)	2(Green)	3(Blue)	4(Black)
I1	+Supply	NC	Shell	-Supply
V1	+Supply	Out	Shell	GND
W1	+Supply	485+(A)	485-(B)	GND
W2	+Supply	232Rx	232Tx	GND


- Current two-wire 4ma to 20mA

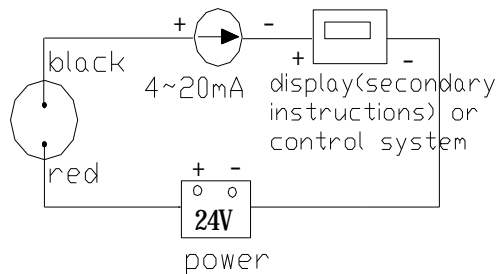

- Voltage three-wire 0v to 5v

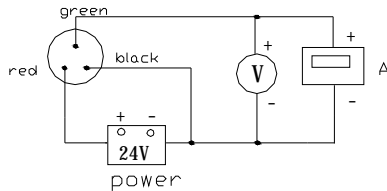

MOUNTING DIMENSION

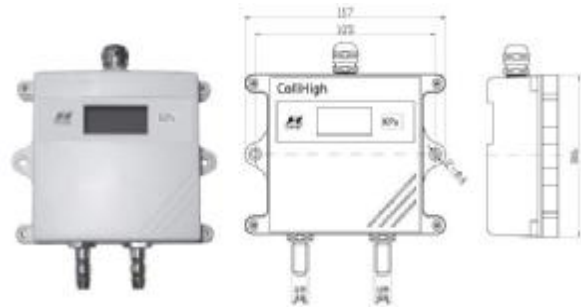

NOTES

- 1• Because the sensor belongs to the precision component, in order to prevent damages of the product, don't disassemble voluntarily and touch a film slice, please.
- 2• When make a survey of high-pressure, must install buffer equipment in the exit of the connection between the sensor and the medium, which can avoid the momentary pulse high-pressure and the damages of sensors.
- 3• Accuracies stated are expected for best fit straight line for all errors including linearity, hysteresis & non-repeatability thru zero.
- 4• When install the pressure transmitter, must use the spanner from the bottom of the nut to screw tightly, avoid directly turning on the upside.
- 5• In order to production's airproof, our advice is use $\Phi 6$ - $\Phi 8$ wiring from the side of terminal.
- 6• This production only measures non-corrosive dry gas.